NDS

◆ Features :

- Trapped rollers Freewheels NLD model is non-bearing supported, So bearings are required to support axial & radial loads.
- Lubrication & Sealing must be provided for Installation.
- Inner race is keyed to shaft, expect 6mm bore.
- Outer race has positive r6 Tolerance to give a press fit in H7 Housing. Outer Housing must be strong enough to not expand after assembly.
- This Design can accept an axial misalignment of inner & outer race of ± S/2.
- Bore range : up to 80 mm
- Transmitting torque : 1063 Nm
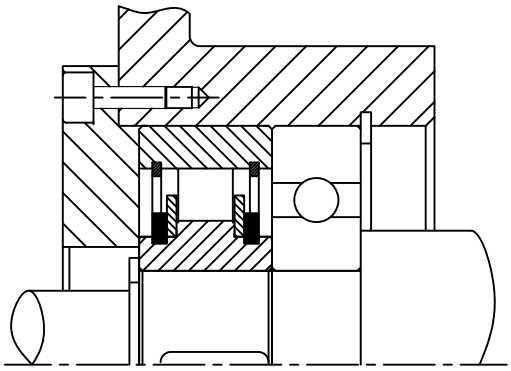
◆ Mounting Example: