


NR

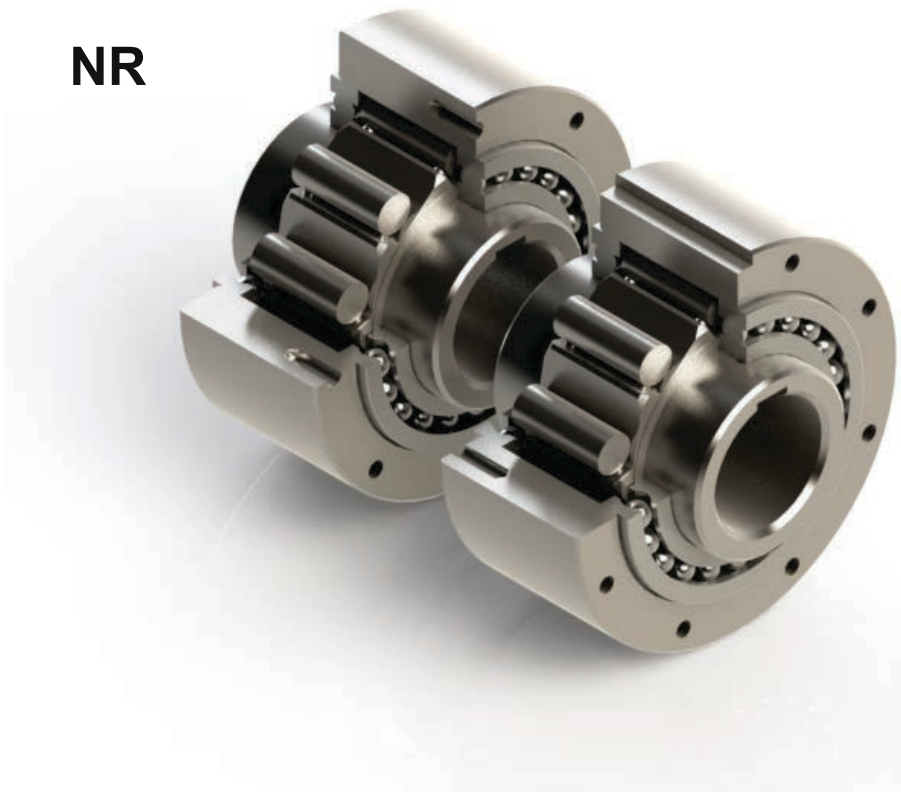

NRK

◆ Features :

- Trapped rollers Freewheels NR, NRK model are Self-centering by means of pairs of ball bearing supported.
- Requires Oil lubrication
- This models are open design so sealing must be provided for the installation.
- Component mounted onto the outside diameter of Outer race should be bored to H7 tolerance & Shaft tolerance must be h6.
- NRK model has keyway on the outer side diameter to transmit torque.
- This models are also supplied with C series covers that are designed to transmit torque, provide oil lubrication & sealing. Generally these covers are used in pairs according to Combination which is shown in the following pages.
- Bore range : up to 150 mm
- Transmitting torque : 70000 Nm

◆ Mounting Example:

